



RAPID SHOWER TENT

USER MANUAL



Thank you for purchasing a 23ZERO RAPID SHOWER TENT

Please read these instructions carefully before installing the awning to your vehicle. Check all parts are included prior to first use.

<p>Bracket x 2</p> 	<p>Mounting plate x 2</p> 
<p>Hanging cord x 1</p> 	<p>Spanners</p> 
<p>Shower head holder</p> 	<p>55mm M8 nut/ bolt x 4 16mm M8 nut/ bolt x 4</p> 

23ZERO recommends using a qualified or experienced fitter to mount the Rapid shower tent to your vehicle. Fasteners and all fixing connections including hinges bolts should be checked and inspected regularly to ensure the awning is fixed securely to your vehicle roof rack at all times.

Note: We highly recommend discussing specific load capacities and mounting options with a specific roof rack retailer or installer.



Prolonged traveling on uneven tracks and/or corrugated roads will require more frequent inspections. 23ZERO takes no responsibility or liability for fitment of the Osprey 270 awning to your specific vehicle or trailer

CONTENTS

Fitting brackets to roof racks ----- 2

Fitting shower tent to brackets ----- 3

Set up ----- 4


Pack down ----- 5, 6

Care and Safety ----- 7

Warranty ----- 8

Fitting brackets to roof bars / roof rack

Rapid shower tent mounting brackets are suited to many roof rack designs, however, with the increasing number of new designs / models available from reputable brands, additional hardware may need to be obtained for correct secure fitment.

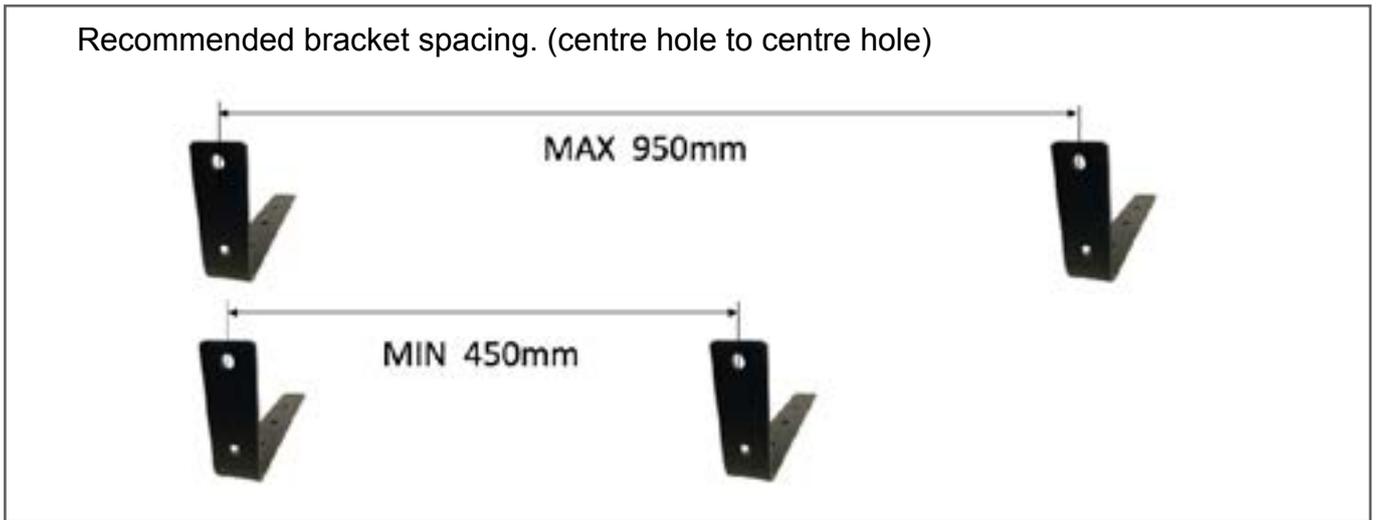

Securing brackets to side bars or mesh based roof racks can be done utilizing the supplied bolts and mounting plates. See Fig.1.

Alternatively brackets can be mounted to platform or channeled roof bars with the use of specific T-bolts (not supplied). Fig.2.

Fig.1

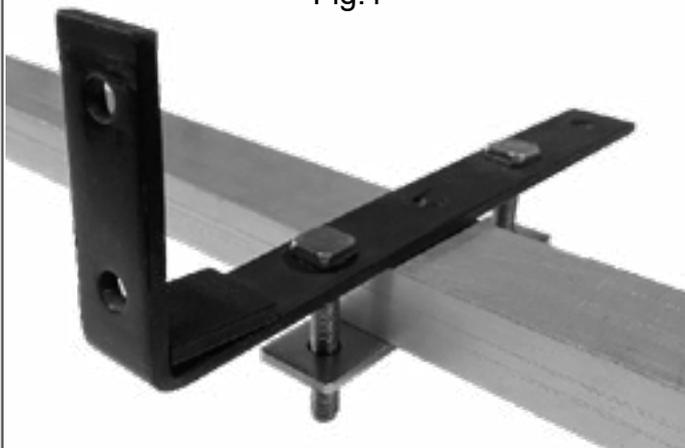



Fig.2



NOTE: If your set up requires T-Bolts to secure brackets, these can be purchased by visiting www.23zero.com.au or visit your local roof rack dealer for specific fasteners.

Fitting shower tent to brackets

With rear of shower tent facing upward, remove plastic end cap from one end and slide 2 x M8 16mm bolts in each channel, 4 bolts total. Replace end cap.

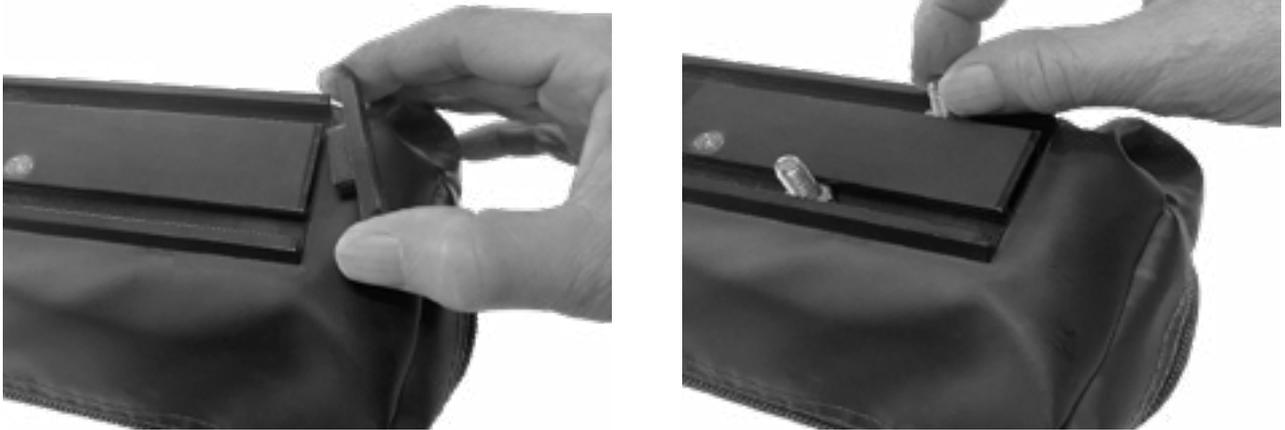

Adjust bolts in the channel to the spacing of your mounted brackets, Fig.3
 Fit shower tent to brackets ensuring all 4 bolts feed through bracket holes. Fit washers, Nyloc nut and hand tighten, Fig.4
 Adjust final position and tighten all with supplied spanner. Fitting complete. Fig 5.

Fig.3



Fig.4

Fig.5



Set up

Unzip transit cover and fold over. Release the 2 outer retaining straps and allow curtain to unroll and drape.



Release the 2 inner retaining straps to release rafters Fig.6 and swing top rafter out Fig.7. Swing bottom rafter out to fully deploy shower tent Fig.8. Anchor all bottom corners to complete set up.

NOTE: Shower tent rafter position may differ depending on time of production. Upper rafter arms can swing from either LHS or RHS.



Fig.6



Fig.7



Fig.8

Pack up

Remove all pegs, towels and empty internal pockets.
Press hinge release lever on **LOWER** rafter arm and fold inward



NOTE: Shower tent rafter position may differ depending on time of production. Lower rafter arms can swing from either LHS or RHS.

Repeat by pressing hinge release lever on **UPPER** rafter arm and fold inward.
Attach 2 inner retaining straps to secure rafter arms.



Pack Up

Ensure curtain is draping flat Fig.9. Grab bottom hem rods and roll up curtain tightly. Attach hook & loop retaining straps to secure roll Fig 10.

Fig 9.



Fig 10.



Zip up transit cover. Pack up complete



Care and Safety

CLEANING

Clean with lukewarm water and soft bristle brush.
Do not use soaps and or detergents.
Do not expose to petro chemicals.

STORAGE

Certain situations may require the RAPID SHOWER TENT to be packed down wet. It is essential that at the earliest opportunity the awning is unpacked and allowed to dry fully. Though we use the best polyurethane proofing available, prolonged exposure to moisture causes hydrolysis which can affect the integrity of the proofing. Storing awning wet in warm conditions is likely to cause mildew growth which will stain and lead to premature breakdown.

STRUCTURAL

The RAPID SHOWER TENT has been designed for general use under normal conditions. Designed as a free standing awning for the purpose of easy set up, it is strongly recommended that the RAPID SHOWER TENT is firmly anchored at all times regardless how good conditions may be. Failure to anchor the awning could result in product failure or vehicle damage.

WATERPROOFNESS

23 ZERO use a selection of refined raw materials and treatments in its design and development processes including long lasting polyurethane coatings and high frequency seam sealing. With multiple layer seams and addition of zips, wind driven rain may cause small amounts of water ingress at times. Rubbing a softened candle wax stick over the affected area will help reduce any water ingress.



TO AVOID PERSONAL INJURY AND OR PROPERTY DAMAGE, 23ZERO RECOMMENDS THE RAPID SHOWER TENT SHOULD NOT BE ERECTED DURING WINDY AND OR ADVERSE WEATHER. DAMAGE CAUSED BY WEATHER OR IMPROPER USE IS NOT COVERED UNDER



SAFETY WARNINGS

KEEP ALL FLAME AND HEAT SOURCES AWAY FROM AWNING FABRIC.

UNDER NO CIRCUMSTANCES SHOULD ANY NAKED FLAME SOURCES BE USED NEAR THE AWNING.

KEEP CAMP FIRES AT LEAST 20 METERS AWAY FROM AWNING.

WATCH FOR AIRBORNE BURNING EMBERS THAT MAY COME IN CONTACT WITH THE AWNING

KEEP A FIRE EXTINGUISHER OR WATER BUCKET NEARBY

KEEP EXITS CLEAR

VEHICLE EXHAUST FUMES CAN BE DEADLY - DO NOT RUN VEHICLE ENGINE WHILST WALLS ARE ATTACHED TO THE AWNING.

WATCH FOR GUY ROPES AND PEGS AS THEY CAN BE A TRIP HAZARD

ENSURE CHILDREN ARE SUPERVISED AROUND THE AWNING AT ALL TIMES.

2 Year Warranty

23ZERO will replace or repair any product at its discretion that is subject to faulty manufacturing or workmanship including materials.

Exclusions

The above warranty is limited to manufacturing and materials defects. Not including damage caused by misuse or abuse, wear and tear, condensation, extreme weather, accidents, incorrect set up, damage caused by mould, insects, animals or children. This also excludes broken poles and damage caused by a jammed, snagged zipper or excessive force applied to zipper causing failure.

Consumer rights

Our goods come with guarantees that cannot be excluded under Australian law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have goods repaired or replaced if the goods fail to be of acceptable quality and failure does not amount to a major failure.

* Due to our policy of continual product development, the specifications, colours and features may vary.

Making a claim

To make a claim in relation to the above manufacturers warranty please ensure you retain your sales receipt of purchase. Please email us at service@23zero.com.au stating the nature of your claim and we will be in touch with you shortly. If you require additional assistance, please phone 03 9547 4691 to discuss and arrange your claim. Product subject to warranty will be sent to 23ZERO Australia, 32b Eileen Rd. Clayton South, Victoria 3169. All freight costs associated with return of product for assessment is payable by consumer.

