



# RAPID SHOWER TENT OPTIONAL ROOF & FLOOR KIT

USER MANUAL



## Thank you for purchasing the 23ZERO RAPID SHOWER OPTIONAL ROOF & FLOOR KIT.

Please read these instructions carefully before installing the awning to your vehicle. Check all parts are included prior to first use.

### Fitting touch tape to shower tent

Shower tents purchased before August 2023 require a strip of touch tape to be fitted to the shower tent body. 1 metre of touch tape, 3 pop rivets and 3 washers are included with the Rapid shower tent optional roof & floor kit.

#### TOOLS REQUIRED

- Tape measure
- Marking pen or pencil
- Drill
- 5mm Drill bit
- Pop rivet gun
- Scissors



**IMPORTANT:** WHEN DRILLING POP RIVET HOLES, THE MEASUREMENTS BELOW MUST BE FOLLOWED TO ENSURE SMOOTH OPERATION OF THE SHOWER TENT AWNING.

- Using 5mm drill bit, drill 3 holes into the top of shower tent main body. Fig.1  
Follow diagram below for recommended hole positions. Fig 2


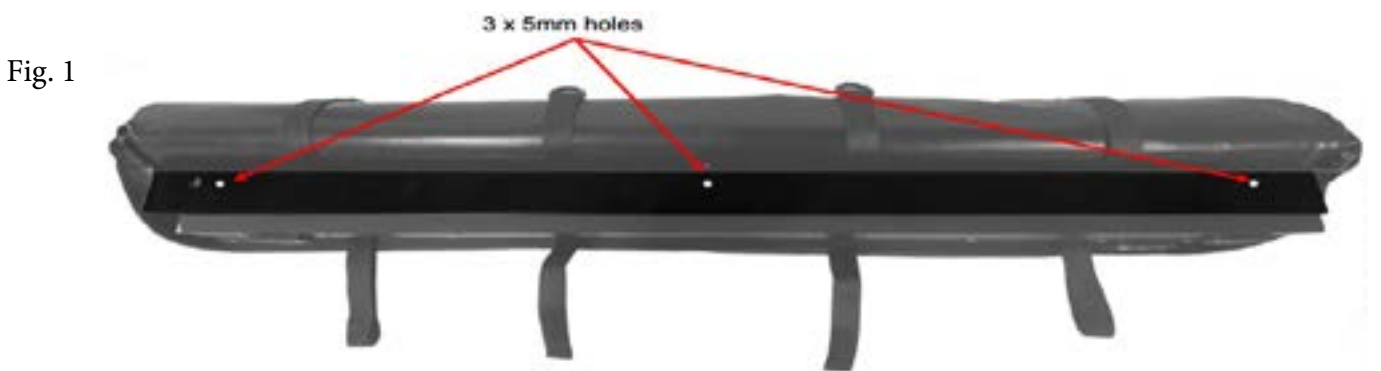


Fig. 2



Left hand side hole

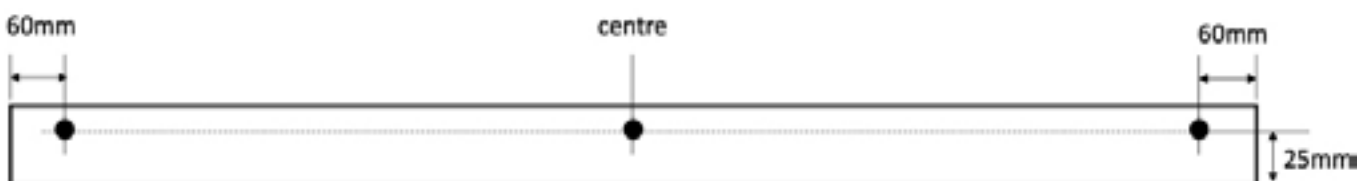

Right hand side hole



2. Pierce/drill hole through supplied touch tape approx 10mm from edge. Feed pop rivet and washer through this hole (Fig 1.) and fix to shower tent awning body using pop rivet gun (Fig 2.)


Fig. 1



Fig. 2



3. Repeat this process for middle hole and 3rd hole ensuring touch tape is stretched as tight as possible.

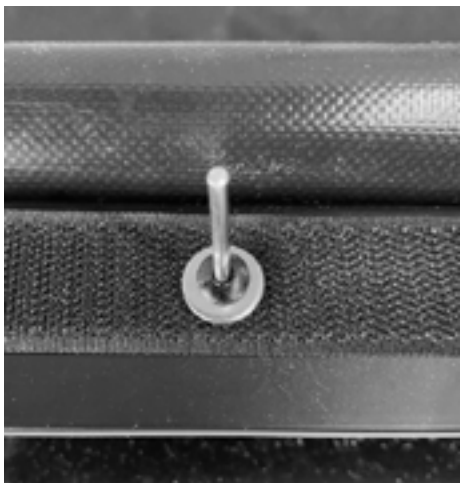

4. Using scissors, trim excess touch tape approx 10mm past pop rivet.



Process complete

## Fitting roof to shower tent

1. Locate touch tape edge on optional shower tent roof and attach to shower tent.



2. Attach front touch tape tabs to front of rafter arms as pictured below. Both sides



3. Attach rear touch tape tabs to rear curtain straps as pictured below. Both sides



### **Using optional PVC Floor**

The Optional PVC floor has 4 shock cord pegs points in each corner. These line up with the peg points on the Rapid shower tent. Use pegs supplied with the Rapid shower tent to anchor these to the ground if desired.

## Care and Safety

### CLEANING

Clean with lukewarm water and soft bristle brush.  
Do not use soaps and or detergents.  
Do not expose to petro chemicals.

### STORAGE

Certain situations may require the RAPID SHOWER TENT & optional roof kit to be packed down wet. It is essential that at the earliest opportunity that these are unpacked and allowed to dry fully. Though we use the best polyurethane proofing available, prolonged exposure to moisture causes hydrolysis which can affect the integrity of the proofing.  
Storing awning wet in warm conditions is likely to cause mildew growth which will stain and lead to premature breakdown.

### STRUCTURAL

The RAPID SHOWER TENT & optional roof kit has been designed for general use under normal conditions.  
Designed as a free standing awning for the purpose of easy set up, it is strongly recommended that the RAPID SHOWER TENT is firmly anchored at all times regardless how good conditions may be. Failure to anchor the awning could result in product failure or vehicle damage.

### WATERPROOFNESS

23 ZERO use a selection of refined raw materials and treatments in its design and development processes including long lasting polyurethane coatings and high frequency seam sealing. With multiple layer seams and addition of zips, wind driven rain may cause small amounts of water ingress at times. Rubbing a softened candle wax stick over the affected area will help reduce any water ingress.



**TO AVOID PERSONAL INJURY AND OR PROPERTY DAMAGE, 23ZERO RECOMMENDS THE RAPID SHOWER TENT SHOULD NOT BE ERECTED DURING WINDY AND OR ADVERSE WEATHER. DAMAGE CAUSED BY WEATHER OR IMPROPER USE IS NOT COVERED UNDER**



## SAFETY WARNINGS

KEEP ALL FLAME AND HEAT SOURCES AWAY FROM AWNING FABRIC.

UNDER NO CIRCUMSTANCES SHOULD ANY NAKED FLAME SOURCES BE USED NEAR THE AWNING.

KEEP CAMP FIRES AT LEAST 20 METERS AWAY FROM AWNING.

WATCH FOR AIRBORNE BURNING EMBERS THAT MAY COME IN CONTACT WITH THE AWNING

KEEP A FIRE EXTINGUISHER OR WATER BUCKET NEARBY

KEEP EXITS CLEAR

VEHICLE EXHAUST FUMES CAN BE DEADLY - DO NOT RUN VEHICLE ENGINE WHILST WALLS ARE ATTACHED TO THE AWNING.

WATCH FOR GUY ROPES AND PEGS AS THEY CAN BE A TRIP HAZARD

ENSURE CHILDREN ARE SUPERVISED AROUND THE AWNING AT ALL TIMES.

## 2 Year Warranty

23ZERO will replace or repair any product at its discretion that is subject to faulty manufacturing or workmanship including materials.

### **Exclusions**

The above warranty is limited to manufacturing and materials defects. Not including damage caused by misuse or abuse, wear and tear, condensation, extreme weather, accidents, incorrect set up, damage caused by mould, insects, animals or children. This also excludes broken poles and damage caused by a jammed, snagged zipper or excessive force applied to zipper causing failure.

### **Consumer rights**

Our goods come with guarantees that cannot be excluded under Australian law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have goods repaired or replaced if the goods fail to be of acceptable quality and failure does not amount to a major failure.

\* Due to our policy of continual product development, the specifications, colours and features may vary.

### **Making a claim**

To make a claim in relation to the above manufacturers warranty please ensure you retain your sales receipt of purchase. Please email us at [service@23zero.com.au](mailto:service@23zero.com.au) stating the nature of your claim and we will be in touch with you shortly. If you require additional assistance, please phone 03 9547 4691 to discuss and arrange your claim. Product subject to warranty will be sent to 23ZERO Australia, 32b Eileen Rd. Clayton South, Victoria 3169. All freight costs associated with return of product for assessment is payable by consumer.

